



Transformador Tipo Sumergible Monofásico

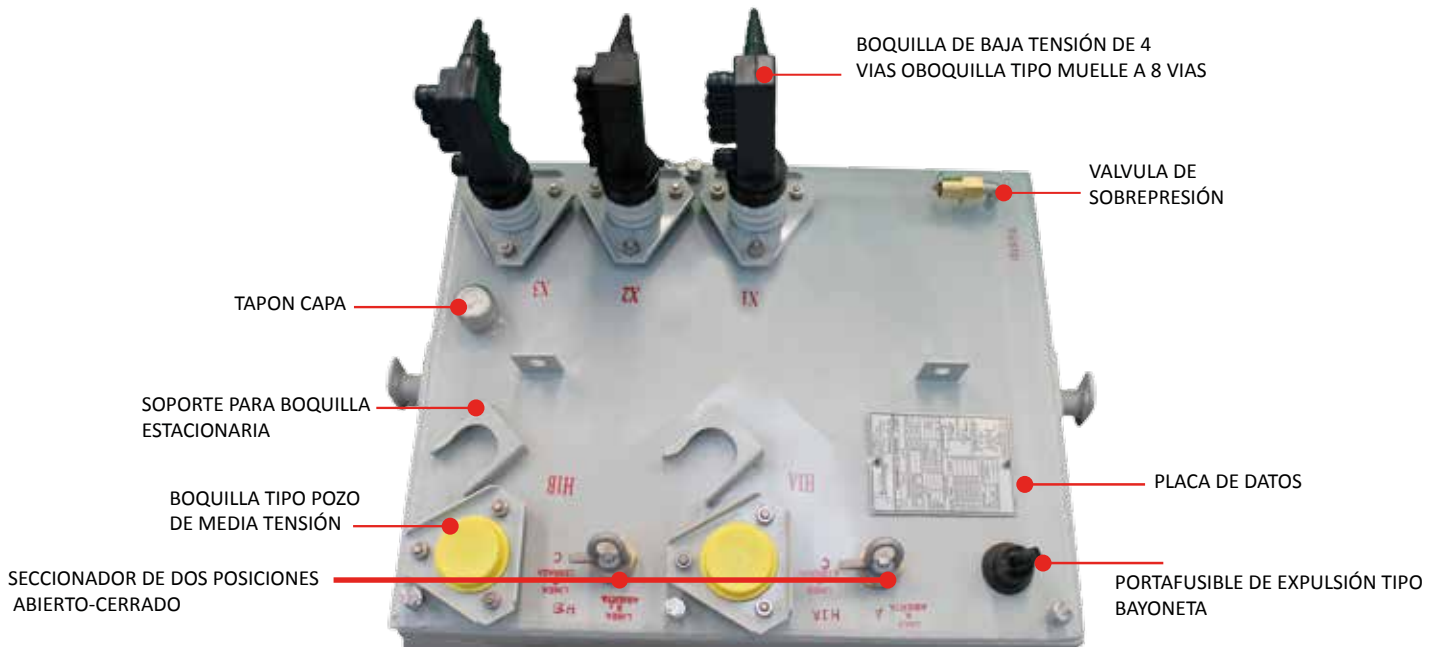

DIMENSIONES GENERALES					
CLASE 15 kV 13200YT/7620-240Y/120V CON O SIN ITM					
kVA	A (mm)	B (mm)	C (mm)	D (mm)	Peso (kg)
25	1160	890	600	550	380
37.5	1120	890	600	550	400
50	1120	890	600	550	430
75	1130	890	645	600	520
100	1250	980	760	630	680
CLASE 25 kV 22860YT/13200-240Y/120V con o sin ITM					
25	---	---	---	---	---
37.5	---	---	---	---	---
50	1165	900	650	610	490
75	1165	920	690	630	540
100	1250	990	750	645	650
CLASE 34.5 kV 33000YT/19050-240Y/120 V con o sin ITM					
25	---	---	---	---	---
37.5	---	---	---	---	---
50	1125	775	600	750	500
75	1125	775	600	750	650
100	1225	775	600	750	700

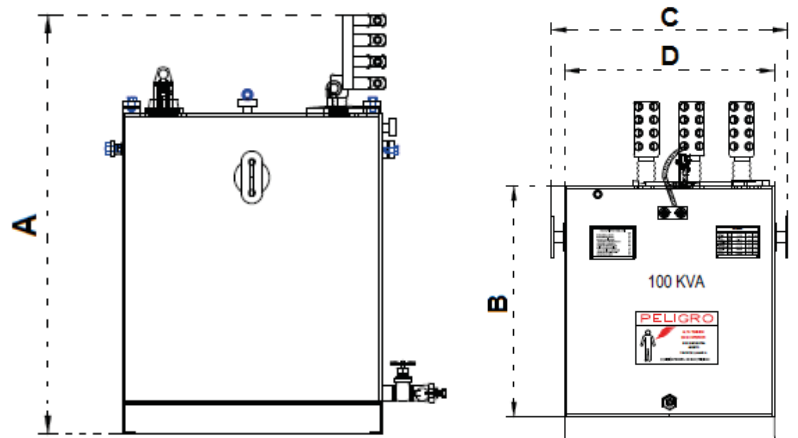

TRANSFORMADOR TIPO SUMERGIBLE																		
NORMA K0000-19 y NMX-J-116																		
CLASE 15kV							CLASE 25kV						CLASE 34.5kV					
kVA	Pv	Pc	Pt	%Z	%η	%lex	Pv	Pc	Pt	%Z	%η	%lex	Pv	Pc	Pt	%Z	%η	%lex
25	86	282	368	1.5-3.0	98.55	1	100	294	394	1.5-3.25	98.45	1	---	---	---	1.5-3.5	---	1
37.5	114	399	513	1.5-3.0	98.65	1	130	422	552	1.5-3.25	98.55	1	---	---	---	1.5-3.5	---	1
50	138	495	633	1.5-3.0	98.75	1	160	524	684	1.5-3.25	98.65	1	---	---	---	1.5-3.5	---	1
75	186	648	834	1.5-3.0	98.90	1	215	696	911	1.5-3.25	98.80	1	---	---	---	1.5-3.5	---	1
100	235	826	1061	1.5-3.0	98.95	1	265	898	1163	1.5-3.25	98.85	1	---	---	---	1.5-3.5	---	1

* Fabricados en acero al carbón o en acero inoxidable